

Monitor system use in truck,bus,express car,special vehicle

REAR VIEW SYSTEM

AHD Monitor



Before using the product, please read this manual carefully and keep it for future reference.

● **AHD Monitor (2CH/3CH)**




7" AHD 2CH monitor

- | | |
|---------------------|---------------------------|
| 1. Sunshade cap | 7. Power |
| 2. Display screen | 8. CH1 |
| 3. Metal LOGO plate | 9. CH2 |
| 4. "-" | 10. |
| 5. MENU | 11. Remote control window |
| 6. "+" | |

7" AHD 2CH monitor

- | | |
|--------------------------|----------|
| 1. Sunshade cap | 5. V1/V2 |
| 2. Display screen | 6. "-" |
| 3. Remote control window | 7. MENU |
| 4. Power | 8. "+" |

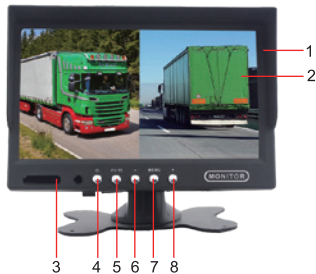

5" AHD monitor

- | | |
|-------------------|--------------------------|
| 1. Sunshade cap | 5. Power |
| 2. Display screen | 6. "-" |
| 3. Mode switch | 7. "+" |
| 4. Menu | 8. Remote control window |

5.6" AHD monitor with touch button

- | | |
|--------------------------|----------------|
| 1. Sunshade cap | 5. "+" |
| 2. Display screen | 6. "-" |
| 3. Remote control window | 7. MENU |
| 4. Power | 8. Mode switch |





6.2" AHD monitor with touch button

- | | |
|-------------------|--------------------------|
| 1. Sunshade cap | 5. Power |
| 2. Display screen | 6. "+" |
| 3. MENU | 7. Mode switch |
| 4. "-" | 8. Remote control window |



7" AHD waterproof monitor with touch button

- | | |
|-------------------|----------|
| 1. Sunshade cap | 6. Power |
| 2. Display screen | 7. CH1 |
| 3. "-" | 8. CH2 |
| 4. MENU | 9. CH3 |
| 5. "+" | |

7" AHD monitor with touch button


- | | |
|--------------------------|----------------|
| 1. Sunshade cap | 5. "+" |
| 2. Display screen | 6. "-" |
| 3. Remote control window | 7. MENU |
| 4. Power | 8. Mode switch |



7" AHD monitor with touch button

- | | |
|-------------------|---------|
| 1. Display screen | 4. "+" |
| 2. Power | 5. MENU |
| 3. AV switch | 6. "-" |



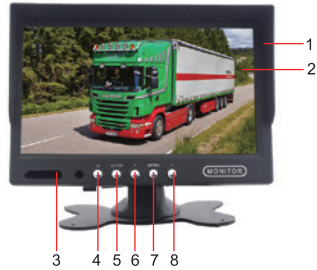

7" AHD monitor

- 1. Sunshade cap
- 2. Display screen
- 3. Remote control window
- 4. Power
- 5. AV switch
- 6. "-"
- 7. MENU
- 8. "+"

7" 9" 10.1" AHD monitor



- 1. Sunshade cap
- 2. Display screen
- 3. Metal LOGO plate
- 4. "-"
- 5. MENU
- 6. "+"
- 7. Power
- 8. CH1
- 9. CH2
- 10. CH3
- 11. Remote control window




1) Specifications

Model	5.6"	5"	6.2"	7"	9"	10.1"
Screen size	5.6 inch	5 inch	6.2 inch	7 inch	9 inch	10.1 inch
Aspect ratio	4:3	16:9				
Luminance	350/400/500/600 cd/ m ²					
Resolution	640*RGB*480	800*RGB*480		1024*RGB*600		
Video	2/3 Ways video input					
Display mode	1channel full screen display,2 channel split view (AHD 2CH only)					
System	PAL & NTSC automatically					
Voltage	12V-24V					
Language	Multi-language					
OSD Menu	Display menu,Brightness,Color,Contrast adjustable					
Built-in speaker	Optional (For waterproof monitor no speaker)					
Bracket	U shaped bracket (Stand alone bracket optional)					
Sunshade	Yes					
Accessories	Power cable*1,Remote Control*1,Bracket,User manual					
DVR recording	Only optional for AHD 2CH monitor					

2) Electrical connection instructions

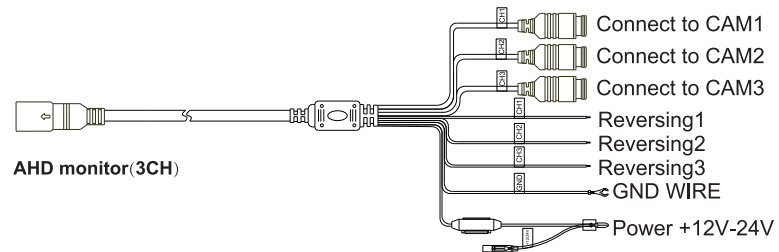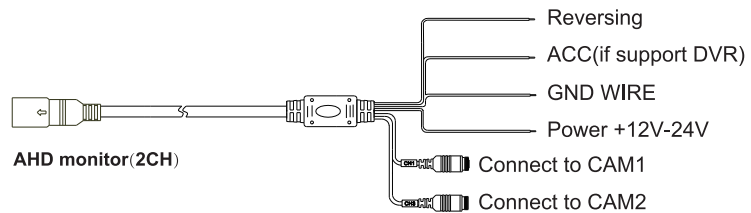

3) Operating instructions for the remote control

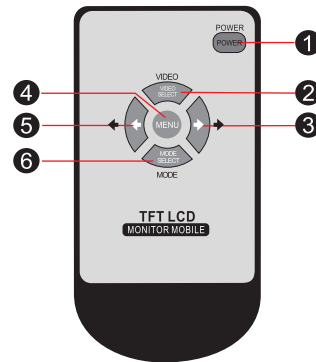

- 1.Power 2.Switch over 3."+" 4.Menu 5."-" 6.Mode select

● AHD Quad Monitor (4CH)



7" AHD quad monitor

- | | |
|-------------------|---------------------------|
| 1. Sun shade | 6. Power |
| 2. Display screen | 7. CH3 |
| 3. Menu | 8. CH4 |
| 4. CH1 | 9. Mode switch |
| 5. CH2 | 10. Remote control window |

7" AHD quad monitor with touch button

- | | |
|--------------------------|----------------|
| 1. Sunshade cap | 5. "+" |
| 2. Display screen | 6. "-" |
| 3. Remote control window | 7. MENU |
| 4. Power | 8. Mode switch |




7" AHD quad monitor

- | | |
|--------------------------|--------|
| 1. Sun shade | 6. CH1 |
| 2. Display screen | 7. CH2 |
| 3. Remote control window | 8. CH3 |
| 4. Power | 9. CH4 |
| 5. Mode switch | |

7" AHD quad monitor

- | | |
|-------------------|---------------------------|
| 1. Sun shade | 6. Power |
| 2. Display screen | 7. CH3 |
| 3. Menu | 8. CH4 |
| 4. CH1 | 9. Mode switch |
| 5. CH2 | 10. Remote control window |

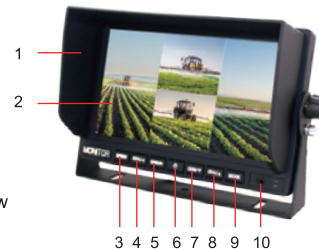

IP68



7" AHD quad waterproof monitor with touch button

- 1. Sunshade cap
- 2. Display screen
- 3. MENU
- 4. CH1
- 5. CH2
- 6. Power
- 7. CH3
- 8. CH4
- 9. Mode switch

9" 10.1" AHD quad monitor


- 1. Sunshade cap
- 2. Display screen
- 3. MENU
- 4. CH1
- 5. CH2
- 6. Power
- 7. CH3
- 8. CH4
- 9. Mode switch
- 10. Remote control window




1) Specifications

Model	7"	9"	10.1"
Screen size	7 inch	9 inch	10.1 inch
Aspect ratio	16:9		
Luminance	350/400/500/600 cd/ m ²		
Resolution	1024*RGB*600		
Video	4 Ways video input		
Display mode	1channel full screen display,2/3/4 channel split view		
System	PAL & NTSC automatically		
Voltage	12V-24V		
Language	Multi-language		
OSD Menu	Display menu,Brightness,Color,Contrast adjustable		
Built-in speaker	Optional		
Bracket	U shaped bracket (Stand alone bracket optional)		
Sunshade	Yes		
Accessories	Power cable*1,Remote Control*1,Bracket,User manual		
DVR recording	optional		

2) Electrical connection instructions

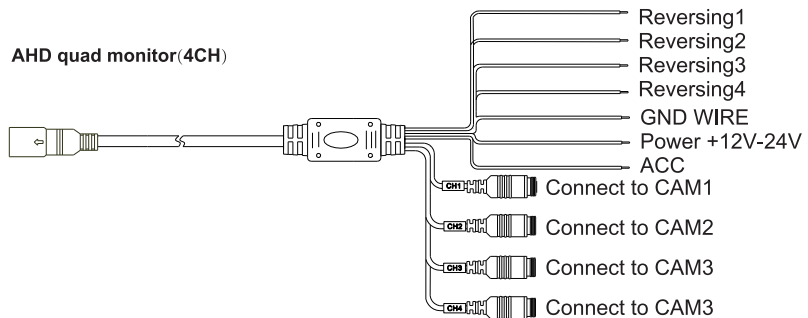


3) Operating instructions for the remote control

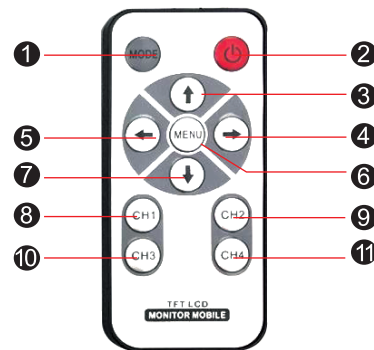

- 1.Mode 2.Power 3.Up 4.Right 5.Left
6.Menu 7.Down 8.CH1 9.CH2 10.CH3 11.CH4



3) Operating instructions for the remote control (for DVR monitor)

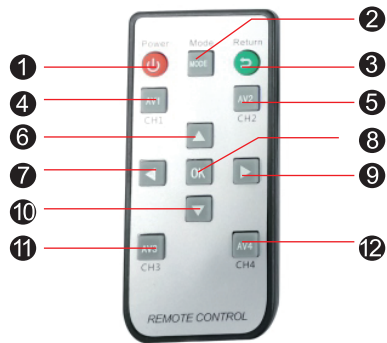



1. Power 2. Mode 3. Return to the default screen/ to the previous step
4. CH1 5. CH2 6. Up 7. Left 8. Menu+confirmation 9. Right
10. Down 11. CH3 12. CH4

● Product Installation(U Shaped Bracket)



1.Remove the screw around then take out the monitor. Put U type bracket to the right place and adjust,prepare 3 screws.(See below pictures)



2.Locking the bracket by screws.Put the monitor into bracket,adjust angle and locking it.(See below pictures)




3.Finish installation.The adjustable angel is forward 30° and backward 30°.User can adjust a suitable angle by themself.(See below pictures)

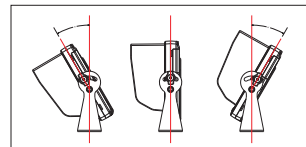

● Product Installation(Stand Alone Bracket)



1. Fix the screws to make fan shaped bracket installed tightly on the proper place, and put the metal buckle piece on the top of the fan shaped bracket into the notch at the back of the monitor. (See below pictures)




Tapping screw or machine screw with nut



2. Move the bracket to the proper location, and fix the big screws of the bracket until to keep the monitor tightly. (See below pictures)

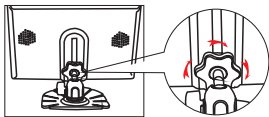

3.If users want to change the direction or angle of the monitor,firstly to loosen the screws on the bottom of the bracket.Then move the monitor to the desired location then fix the screws on the bottom of the bracket again. (See below pictures)

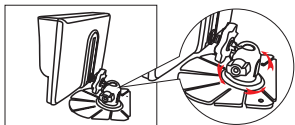

● Announcements

To ensure our safety,the driver should not watch the video files or operate the monitor.The amateurish workers should not disassemble it without permission.If there are any product problems, please consult the local after-sales agency or take the defective product to the local maintenance department for repairing.

Warning: Please obey the local laws to install the product at a right position. Our company is not responsibility for the law issue caused by the illegal installing.

Attention: When the weather is very cold. The LCD may be dark with power on. After the temperature will increase gradually, the LCD should be back to normal.

Don't press the LCD, which will cause the image distortion or faulty. please use soft wet cloth clean the LCD gently. Don't put this product into the wet environment or water (except for the waterproof monitor), which will lead to short circuit, unnecessary loss or fire.please format SD card before insert it to the monitor. And put the SD card into the monitor under power off state.please stop recording or cut off the power before take out the SD card, in case there are any contents lost in the SD card.